


VIP Special master links for 4-leg slings VSAK 4



Description

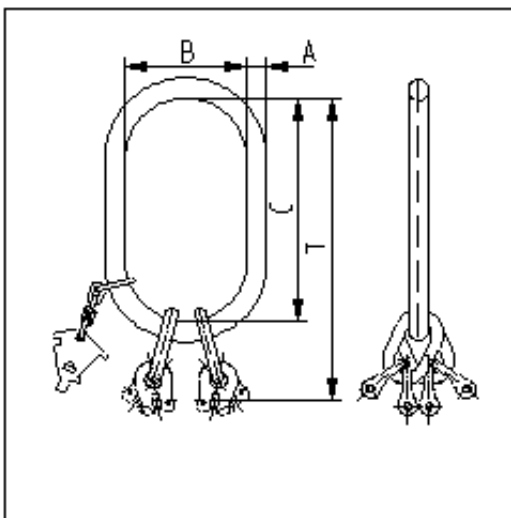

VSAK 4 VIP Special master links for 4-leg slings

VSAK with welded connectors VRG moveable in any direction.

Chain (mm)	WLL (t)			Type	Dimensions (mm)				Weight (kg/pc.)
	60°	90°	120°		A	B	C	T	
6	2.6	2.1	1.5	VSAK 4-6/140	22	140	260	342	3.3
8	4.3	3.5	2.5	VSAK 4-8/140	26	140	260	367	5.0
10	6.9	5.6	4.0	VSAK 4-10/140	32	140	260	391	7.9

Chain (mm)	WLL (t)	Type	Dimensions (mm)	Weight (kg/pc.)
---------------	---------	------	-----------------	--------------------

	60°	90°	120°		A	B	C	T)
6	2.6	2.1	1.5	VSAK 4-6/190	22	190	350	432	3.6
8	4.3	3.5	2.5	VSAK 4-8/190	26	190	350	457	5.5
10	6.9	5.6	4.0	VSAK 4-10/190	32	190	350	481	9.2
13	11.2	9.2	6.5	VSAK 4-13/190	36	190	350	523	13.5

Chain (mm)	WLL (t)			Type	Dimensions (mm)				Weight (kg/pc.)
	60°	90°	120°		A	B	C	T	
10	6.9	5.6	4.0	VSAK 4-10/250	36	250	460	591	14.8
13	11.2	9.2	6.5	VSAK 4-13/250	40	250	460	634	20.4
16	17.3	14.1	10.0	VSAK 4-16/250	51	250	460	671	34.5
20	27.8	22.1	16.0	VSAK 4-20/250	57	250	460	724	51.0
22	34.6	28.2	20.0	VSAK 4-22/250	57	250	460	724	52.0