


HA8 Eye Sling Hook



Description

HA8 Eye Sling Hook

Sling Hook

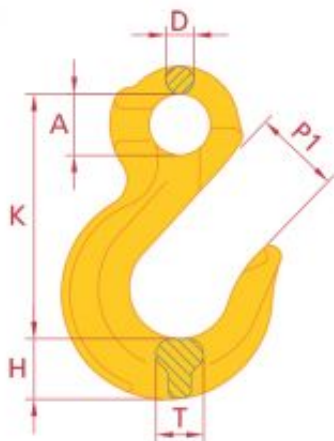

- Test certificates supplied.
- Hooks without a latch are generally used for specific applications, therefore where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.
- Applications: Chain slings.

- Australian Standard: AS 3776.

Chain Size (mm)	WLL (tonnes)	D (mm)	L (mm)	M (mm)	N (mm)	Mass (kg)	Part No	Markings
10.0	3.2	110	24	121	36	0.9	40303A	CM Herc Alloy 3/8 10-8
13.0	5.4	140	28	145	45	2.0	40304A	CM Herc Alloy 1/2 13-8
16.0	8.0	161	33	165	51	3.3	40305A	CM Herc Alloy 5/8 13-8
20.0	12.5	199	37	198	63	5.6	40306	CM Herc Alloy 3/4 18/20-8
22.0	15.5	218	43	223	71	7.9	40307	CM Herc Alloy 7/8 22-8
26.0	21.6	243	47	250	79	10.6	40308	CM Herc Alloy 1 26-8
32.0	32.8	294	58	292	98	16.9	40309	CM Herc Alloy 1 1/4 32 -8

